


- Triple Cavity Version
- Band-Pass Filter
- FM Band 87.5-108 MHz

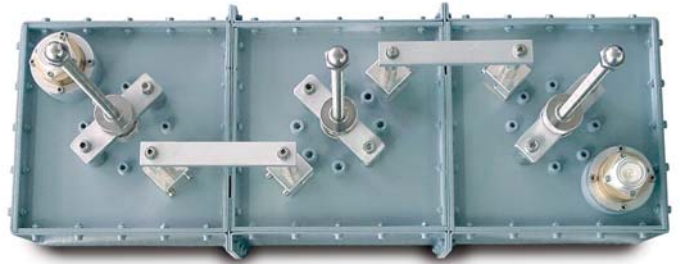

Standard resonant three cavity filters. Also available as four cavity models. Can be used to build multi-channel combiners.

Using our industry-leading cavity filter design, the filter provides a one-time-buy filtering solution for broadcasters located at multiple-user sites.



## TYPICAL SPECIFICATIONS

<b>Model</b>	FFTC3 triple cavity
<b>Impedance</b>	50 Ohm
<b>Frequency Range</b>	87.5+108 MHz
<b>VSWR ±150 KHz</b>	1.1:1 Max
<b>Insertion Loss</b>	at $f_0$ 0.35 dB Max
<b>Return Loss ±150 KHz</b>	≤ -26 dB
<b>Rejection</b>	per customer's requirements (Typically -14dB already at 1MHz)
<b>Connectors</b>	7/8" EIA Input-Output
<b>Max Power</b>	3 KW
<b>Temperature Range</b>	-20°C ÷ +50°C
<b>Color</b>	Enamel gray ral 7001
<b>Materials</b>	Aluminium, silver brass, copper, PTFE, stainless steel, silver plated (min 12µ thickness)

- Distortion – Free
- Standard configuration of 2 cavities
- Special configuration 3 and 4 cavities
- Low loss, high isolation
- Natural convection

## No Rack Version

<b>Dimensions</b>	1300 (Max size) x 610 x 235 mm (51.2-Max Size-X24x9.2 inch) (HxLxW)
<b>Net Weight</b>	≈ 37 Kg (double cavity)

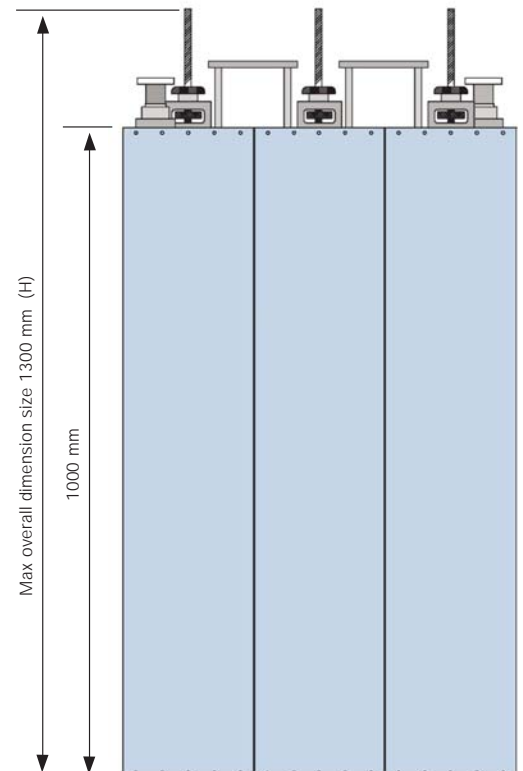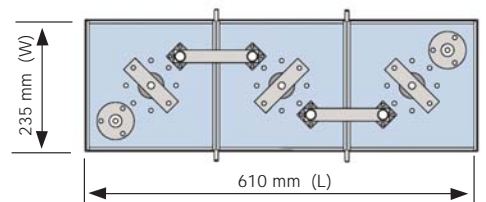

"These specifications are subject to change without notice"