

Model FDCSTC03

- 2 Channel Combiner
- Star Point Type
- FM Band 87.5-108 Mhz


The star point combiner basically consists of connecting several transmitters in parallel to a single antenna system through suitable bandpass filters, each tuned to each individual transmitter frequency

The parallel connection is obtained by means of coaxial lines of determined length, to provide for adequate isolation between transmitters.

TYPICAL SPECIFICATIONS

Model	FDCSTC03 – Type STAR POINT
Impedance	50 Ohm
Frequency Range	87.5÷108 MHz
VSWR ±150 KHz	1.1:1 Max
Insertion Loss	at f_0 0.8 dB Max
Return Loss ±150 KHz	≤ -26 dB
Isolation ±2.0 MHz	≥ 30 dB
No. of input	2
No. of output	1
Connectors	Input N female Output N or 7/16"
Max Power	300 W X 2 CHANNELS
Temperature Range	-20°C ÷ +50°C
Color	Enamel gray ral 7001
Materials	Aluminium, silver brass, copper, PTFE, stainless steel, silver plated (min 12µ thickness)

- Distortion - Free
- Starpoint system with triple pass-band cavity filters
- Low loss, high isolation
- Natural convection
- Optional group delay equalizer

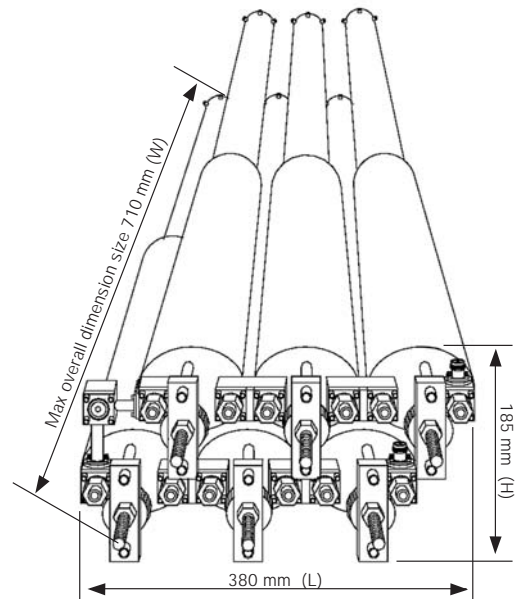


No Rack Version

Dimensions	185 x 380 x 710 mm (7.3 x 15 x 28 inch) (HxLxW)
Net Weight	≈ 18 Kg (triple cavity)

Rack Version (optional)

Panel Size	5 HE (1 HE = 44.45 mm)
Net Weight	≈ 18 Kg (triple cavity)

Typical Shape for S11 and S21 for single filter

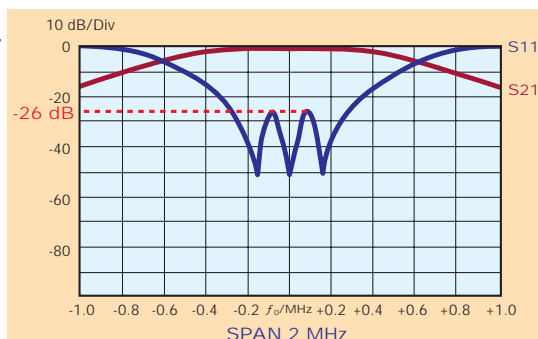

"These specifications are subject to change without notice"