

Model FQCSDC03

- 4 Channel Combiner
- Star Point Type
- FM Band 87.5-108 Mhz

The star point combiner basically consist of connecting several transmitters in parallel to a single antenna system through suitable bandpass filters, each tuned to each individual transmitter frequency.

The parallel connection is obtained by means of coaxial lines of determined length, to provide for adequate isolation between transmitters.

TYPICAL SPECIFICATIONS

Model	FQCSDC03 – Type STAR POINT
Impedance	50 Ohm
Frequency Range	87.5±108 MHz
VSWR ±150 KHz	1.1:1 Max
Insertion Loss	at f_0 0.6 dB Max
Return Loss ±150 KHz	≤ -26 dB
Isolation ±2.5 MHz	≥ 30 dB
No. of input	4
No. of output	1
Connectors	Input N female Output 7/16" or 7/8"
Max Power	300 W X 4 CHANNELS
Temperature Range	-20°C ÷ +50°C
Color	Enamel gray ral 7001
Materials	Aluminium, silver brass, copper, PTFE, stainless steel, silver plated (min 12µ thickness)


- Distortion – Free
- Starpoint system with double bandpass cavity filters
- Starpoint system with triple bandpass cavity filters
- Low loss, high isolation
- Natural convection
- Optional group delay equalizer

No Rack Version

Dimensions	375 x 290 x 710 mm (14.8 x 11.4 x 28 inch) (HxLxW)
Net Weight	≅ 24 Kg

Rack Version (optional)

Panel Size	9 HE (1 HE = 44.45 mm)
Net Weight	≅ 24 Kg

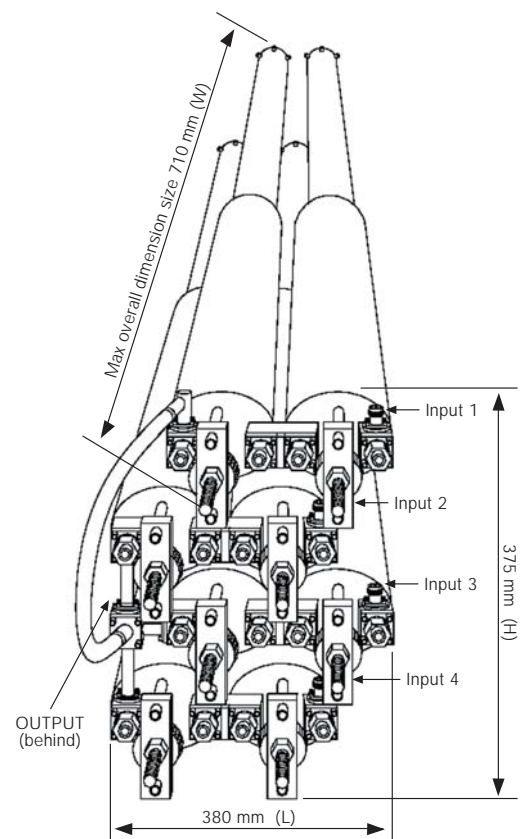

"These specifications are subject to change without notice"